



CANBUILT MFG.

Toll-Free in Canada: 1-888-607-2926 Phone: 416-749-6555 Fax: 416-749-7597
Email: sales@canbuilt.com Website: www.canbuilt.com

103 Milvan Drive,
Toronto, Ontario,
Canada, M9L 1Z7

Wheel Balancers

SOLID, FAST, AND RELIABLE



Top of the Line

Computerized electronic wheel balancing machine with LCD XVGA monitor and three-dimensional graphics to facilitate all the operator's working procedures.

The WB-680 can handle all car wheels up to 30", and all light truck and motorcycle wheels up to a maximum wheel diameters of 44" (1120 mm). Automatic faultfinding and automatic self-calibration ensure an extremely simple maintenance.

Balancing tires with steel, aluminum or alloy rims is a simple process.

Wheel protection guard allows balancing of up to 44" diameter wheels. Maximum Wheel Weight of 175 lbs. For Rim widths from 2" - 20" Rim Diameters from 8" - 30"



Model # WB-680

Computerized, Automatic Wheel Balancer



SPECIFICATIONS

Model	Weight	Motor	Balancing Speed	Wheel Max Weight	Wheel Diameter	Rim Width	Rim Diameter
WB-680	148 Kg.	115V - 1PH	180 RPM	175 lbs	44"	2" - 20"	8" - 30"

Other Wheel Balancers available:

Model # WB-0255

Semi-Automatic Entry Level



Model # WB-0277

Automatic Wheel Balancer for the tire professional with high volume turn around



QUALITY • PERFORMANCE • LONGEVITY

FEATURES



The functional and practical action center gives access to all the machine programs speeding up working (or set up) operations.




Brake pedal to hold tire in place for accurate positioning of counter weights.



Alu data program that resolves all the problems of balancing aluminium rims. The arm in the central part of the weight holder panel indicates the exact position for application of adhesive weights.



- 5 Alu programs for dynamic balancing with adhesive weights
- 3 Static balancing programs (with spring or adhesive weights)
- 2 Special Alu programs for Pax tires with measurements in mm.

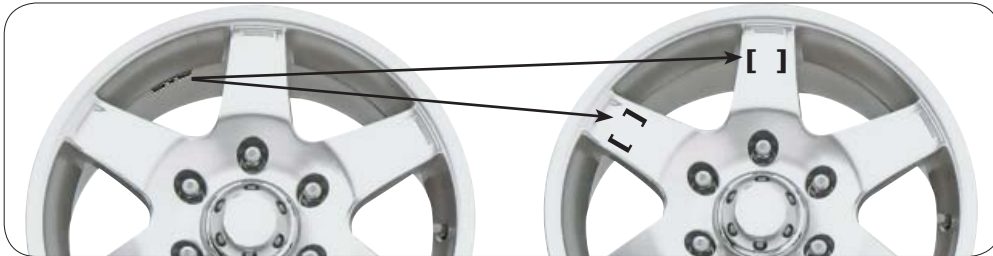

Hidden spoke program that hides adhesive weights behind the rim spokes, optimizing the quality and aesthetic ratio.

STANDARD INCLUDED



- Flange Complete with cones
- Pliers & 100g sample weight
- Rim Width Gauge

OPTIONALS



- 4" Truck cone spacer
- 5" Truck cone spacer
- SUV Universal Spacer
- 3-4-5 hole flange
- Combi Adapter