



CANBUILT MFG.

Toll-Free in Canada: 1-888-607-2926 Phone: 416-749-6555 Fax: 416-749-7597
Email: sales@canbuilt.com Website: www.canbuilt.com

103 Milvan Drive,
Toronto, Ontario,
Canada, M9L 1Z7

Wheel Balancers



Wheel protection guard that allows balancing of up to 44" diameter wheels

Model # **WB-0277**

Full Automatic Data Entry Wheel Balancer

Designed to be robust and feature packed, these computerized digital wheel balancers offer a single, fully automatic cycle designed to provide years of trouble free service.

Easily access all popular Alu data programs using the various function keys that resolve all the problems of balancing aluminum rims.

Model # **WB-0255**

Semi Automatic Entry Level Wheel Balancer

Wheel protection guard that allows balancing of up to 44" diameter wheels.

Maximum Wheel Weight of 155 lbs
For Rim widths from 2" - 20"
Rim Diameters from 8" - 30"



Model # **WB-680**

FOR A NEXT LEVEL

Wheel Balancers
Computerized with LCD display, auto-fault finder.
Fully automatic.



Model # **WBL80**

Wheel Lift Device for Balancer

Works with all of our wheel balancers. It compliments well the WB-680 balancer.

Lifts up to 176 lbs.
Max. wheel diameter 46"
Max. rim diameter 30"



SPECIFICATIONS

Model	Weight	Motor	Balancing Speed	Wheel Max Weight	Wheel Diameter	Rim Width	Rim Diameter
WB-0255	90 Kg.	115V - 1PH	200 RPM	155 lbs	44"	2" - 20"	8" - 30"
WB-0277	90 Kg.	115V - 1PH	200 RPM	155 lbs	44"	2" - 20"	8" - 30"

QUALITY • PERFORMANCE • LONGEVITY

FEATURES



Simultaneous weight and position readings on the double display. Self diagnosis and calibration ensure exceptional accuracy and easy maintenance.




Brake pedal to hold for accurate positioning of counterweights.



Alu data program that resolves all the problems of balancing aluminium rims. The arm in the central part of the weight holder panel indicates the exact position for application of adhesive weights.



- 5 Alu programs for dynamic balancing with adhesive weights
- 3 Static balancing programs (with spring or adhesive weights)
- 2 Special Alu programs for Pax tires with measurements in mm.

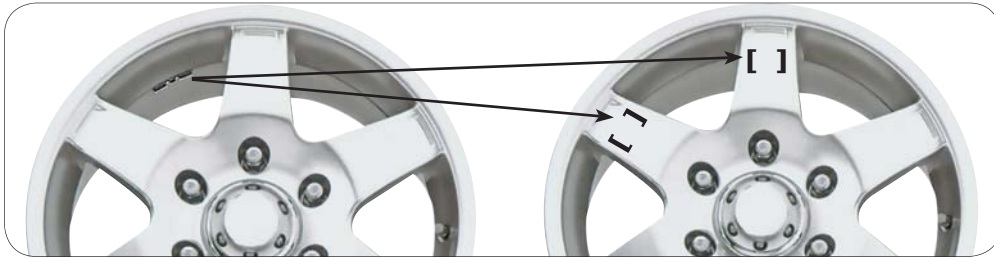

Hidden spoke program that hides adhesive weights behind the rim spokes, optimizing the quality and aesthetic ratio.

STANDARD INCLUDED



- Flange complete with cones
- Pliers and a 100g sample weight
- Rim width Gauge

OPTIONALS

Model # **MB300581**



- Adapter Kit for Light Trucks, Sport and 4x4 Vehicles
- 4" & 5" Centering cones, fit 40mm O.D. flange (shaft)
 - 2 SUV Universal spacers

Model # **MB300105**



- Centre Closed Wheel Adapter kit
- 3-4-5 Hole flange combi adapter